

04/04/00



U.S. PATENT APPLICATION

04-05-00

A

Please type a plus sign (+) inside this box --> ☐Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office. U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

+

UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. FTP141A US

First Inventor or Application Identifier Jerry H. Chisnell

Title Composite Sleeve for Sealing a Tubular Coupling

Express Mail Label No. EL511892545US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g. PTO/SB/17)
(Submit an original and a duplicate for fee processing)2. ☒ Specification [Total Pages 21]
(preferred arrangement set forth below)

- Descriptive title of the Invention
- Gross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

3. ☒ Drawing(s) (35 U.S.C 113) [Total Sheets 2]

4. Oath or Declaration [Total Pages 2]

a. ☒ Newly executed (original or copy)b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).*** NOTE FOR ITEMS 1 & 13. IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28)**ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Attorney
(when there is an assignee) ☐ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (IVIPEP 503)
(Should be specifically itemized)
- 12.a. ☐ **Kindly cancel Claims of the accompanying application before calculating the filing fee**
13. ☐ Statement(s) filed in prior application,
(PTO/SB/09-12) ☐ Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☐ Other: _____

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment.

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. _____

Prior application information Examiner

Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.



021133

Name	Remy J. VanOphem				
Address	VanOphem, Meehan & VanOphem, P.C. 755 West Big Beaver Road, Suite 1313				
City	Troy	State	MI	Zip Code	48084-4903
Country	U.S.A.	Telephone	(248) 362-1210	Fax	(248) 362-4055

Name (Print/Type)	Remy J. VanOphem	Registration No. (Attorney/Agent)	27053
Signature		Date	4-4-00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEE OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

COMPOSITE SLEEVE FOR SEALING A TUBULAR COUPLING

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates in general to conduit connections for fluid systems. More particularly, the present invention relates to a composite sleeve seal for a fluid-tight conduit connection between male and female tubular members of an automobile air-conditioning system.

2. Description of the Prior Art

In conventional tubular couplings, standard O-rings are used to seal the connection between tubular members. The O-rings are seated in grooves in a male or female tubular member and are compressed by a complementary female or male tubular member, thereby sealing the connection. The O-ring grooves are generally machined or formed into one of the tubular members as part of a tube end-forming step in the manufacturing process. Performing this step involves extensive process cycle time and total piece costs.

U.S. Patent No. 4,055,359 to McWethy is an example of the prior art tubular coupling described above. The '359 patent discloses a plurality of O-rings that are compressed in sealed grooves to prevent the coupling from leaking. The O-rings are accommodated by forming spaced circular grooves in the tubular wall of the inner tube.

Alternatively, U.S. Patent No. 4,690,435 to Manning et al. teaches a hose coupling that is sealed by crimping an outer sleeve over an inner sleeve, compressing and sealing a hose therebetween. The outer sleeve has four axially spaced

rings and is crimped at each axially spaced ring creating four annular seals between the hose and the inner sleeve.

Likewise, U.S. Patent No. 4,407,532 to Patel et al. and U.S. Patent No. 5,228,721 to Whittle et al. each disclose a crimped connection that enhances sealing by providing ridges or serrations on the outer surface of the inner sleeve, thereby engaging and sealing the hose. For example, the '532 patent discloses a collar having a plurality of barbs on its inner surface and an insert member having a plurality of closely spaced annular ridges for gripping and sealing a hose member. The plurality of barbs on the inner surface of the collar defines a relationship with the plurality of spaced annular ridges on the outer surface of the insert member to provide crimping of the sleeve onto the hose. After crimping the collar about the insert member, with the hose compressed therebetween, the hose is sealingly engaged between the plurality of grooves and the annular ridges in the collar.

The '721 patent discloses a similar arrangement in which the coupling includes a spigot having one or more circumferentially extending ribs for engagement with the inner surface of the pipe member. A shoulder, from which the spigot extends, is coaxially spaced from the spigot with a resilient sleeve therebetween. A crimp ring is slidably mounted over the sleeve for crimpable attachment to the fitting. The circumferentially extending ribs are forced into sealing engagement with the pipe wall and the resilient sleeve ensures the pipe is not damaged. The spigot is either copper or plastic.

U.S. Patent Nos. 5,044,671 and 5,096,231 to Chisnell et al. disclose a coupling that incorporates an O-ring or resilient sealing member in conjunction with a crimped connection. The '671 reference discloses a hose having an inner liner of thermoplastic material wherein the hose is maintained in compression by a swaged sleeve over a fitting having an O-ring or resilient sealing member located in one of a plurality of grooves into which the thermoplastic liner is cold-formed. The O-ring minimizes the flow of the inner liner at elevated operating temperatures and maintains a seal under varying operating conditions. The '231 reference discloses a resilient sealing member provided on the outer periphery of the fitting to sealingly engage a hose member and provide a seal therebetween.

Each of the above references provides a sealing arrangement that adequately seals a coupling. However, all of the couplings described above require extensive tube end-forming operations to create the grooves that contain the resilient sealing members, or the ridges and circumferentially extending ribs that sealingly engage a hose member.

Furthermore, O-rings are known to be relatively unreliable and subject to failure over time. O-rings provide a good seal when they are at 6% compression. Due to tolerance stack up of the machined groove, the O-ring, and the tubular members, the range of O-ring compression is between 2% and 15%. If the compression is less than 6%, leaks will occur. Alternatively, if the compression is over 15%, several other problems will occur, including: 1) the coupling becomes extremely difficult to assemble over the O-ring; 2) the O-rings undergo considerable deformation during the

coupling process; 3) the life of the O-ring becomes substantially reduced when subjected to high heat; and 4) the O-rings easily become nicked or otherwise damaged resulting in premature failure and poor sealing ability, thereby causing leaks. Thus, there is a need for a more reliable and longer lasting seal for tubular couplings.

5 Conventional tube end-forming operations are also relatively difficult processes to control. The tube wall is thickened by a punching operation that compresses a length of tube. The punching operation is not very repeatable, as it is very material dependent, and results in a large range of dimensional tolerances for the finished product. After the tube wall is thickened the O-ring grooves are cut into the thickened end of the tube. During the cutting operation the tube is held a certain
10 distance from the thickened end, which permits flexing in the tube, resulting in uneven cuts. Also, the particles or chips left behind in an uneven cut can cut the O-ring and lead to premature failure thereof. In sum, poor surface finish and chips resulting from conventional tube end-forming contribute to the O-ring sealing surfaces being
15 unacceptable for proper sealing.

Another problem with conventional tube end-forming processes is side loading that can occur when the tubular connection is torqued. When the connection is torqued, the O-ring can become pinched in one area and decompressed in another area. The decompressed area of the O-ring becomes a leak path. Additionally, under side
20 load conditions the O-ring is assured of failing when subject to the harsh pressure, temperature, and vibration conditions of a vehicular air-conditioning system.

One attempt at eliminating such end-forming operations was disclosed in U.S. Patent 4,781,400 to Cunningham. The Cunningham reference teaches a quick connect tube coupling using a two-piece tubular seal member placed over a male member for providing the effect of two O-rings, without requiring any special endforming operation. Cunningham discloses the tubular seal member including a metal tubular member having a rubber material molded onto one end thereof. The tubular seal member is sandwiched between a male tubular member and a female tubular member. The rubber material includes inwardly extending beads and an axial portion for sealing axially against the female tubular member and for sealing radially against the male tubular member.

While the Cunningham reference enables elimination of endforming requirements for tubular connections, it has a few drawbacks. For example, the rubber material is not positively interlocked with the underlying metal tubular member and therefore may more easily become separated therefrom. Additionally, the rubber material seals only axially, and radially inwardly, which is quite unlike how traditional O-rings seal. Traditional O-rings seal both radially inwardly and outwardly, and thereby better center the male tubular fitting within the female fitting. Accordingly, with Cunningham there is no continuity of the rubber sealing surface from a radial surface on the male tubular fitting to a radial surface in the female tubular fitting.

Another attempt at eliminating end-forming operations was disclosed in French Patent 2,740,526 to Baron. The Baron reference teaches use of a composite gasket of alternating collars and rings to be circumferentially disposed about the end of

a tube within a tubular connection. The Baron reference discloses rigid collars in the shape of cylindrical sleeves that alternate coaxially with elastomer rings to define the gasket. The collars are integrally fixed to the rings by a gluing, casting, or vulcanizing process.

5 While the Baron reference represents another approach to eliminating end-forming operations, it also has several drawbacks. First, each alternating collar and ring must be individually manufactured, resulting in an abundance of individual parts to be made and handled. Second, each individual collar or ring must be assembled to one another, representing more manufacturing steps and cost. Third, each
10 alternating collar and ring must be fused together, thus resulting in still more manufacturing steps. Fourth, due to the harsh environment in which such gaskets are used, a fused connection between the collars and rings may separate. Consequently, the manufacture of the gasket is relatively time consuming and expensive, while performance of such a fused thermoplastic in a demanding environment is not well
15 established.

Prior art tube end-forming operations are time consuming and therefore expensive. Generally, what is needed is a simplified means for sealing a coupling that does not require separate O-rings mounted in machined or formed grooves. The extensive tube end-forming operations, such as machining grooves, or forming
20 circumferentially extending ribs, need to be eliminated to reduce cost. Accordingly, what is needed is a fluid-tight conduit connection that requires neither extensive tube

nor seal manufacturing operations and will enhance the sealing capability of a tubular coupling.

SUMMARY OF THE INVENTION

The present invention overcomes the above-mentioned drawbacks associated with prior art sealing couplings by introducing a composite intermediate sleeve that is mounted over a male tube end, and is received by a female tube end. The composite sleeve seal is a molded, sectioned collar having spaced apart seal portions that are contiguous with the collar sections and are positively interlocked with the collar sections.

Provided in the present invention is a composite sleeve seal for sealing a conduit connection, including a body portion having annular collar sections spaced apart from one another to define gaps therebetween. The annular collar sections are interconnected by link segments spanning the gaps. A seal portion is interposed the collar sections in the gaps and surrounds the link segments to interlock the seal portion with the body portion to form the composite sleeve seal as an integral component.

The collar sections are made of a high temperature plastic and the seal portions are made of a high temperature rubber or other material capable of being compressed between the collar sections to create a seal therebetween. The seal portions are compressed between male and female components, thereby creating a seal.

In conventional fittings, the male component has a set of grooves containing O-rings that are compressed by the female component to create a seal. With the present invention, neither the male component nor the female component has O-

5 rings or O-ring grooves. There are no O-rings, machined grooves, ridges, or ribs on either the male component or the female component. Instead, the composite sleeve of the present invention is positioned between the male tubular member and the female tubular member, thereby creating a seal. Therefore, no time consuming, costly tube end-forming processes are necessary in order to make O-ring grooves. Without machined grooves, the tube end-forming process is a much simpler and more controllable manufacturing process, resulting in a higher quality product.

10 It is an object of the present invention to provide an enhanced seal for a tubular coupling.

15 It is another object of the present invention to eliminate the tolerance stack up associated with conventional O-ring containment and compression methods that create leak paths.

It is yet another object of the present invention to avoid complex and costly machining and tube end-forming processes associated with conventional tubular couplings and associated O-ring grooves.

It is a further object of the present invention to provide a one-piece segmented composite sleeve that is mounted between adjacent ends of adjoining tube members so as to create a seal between the tubular members of a tubular coupling.

20 It is still a further object of the present invention to provide a segmented composite sleeve having collar sections alternating with circumferentially protruding members for engaging and sealing tubular members of a tubular coupling that is a

molded component wherein the collar sections are positively interlocked with the annular protrusions during molding.

It is yet a further object of the present invention to provide a segmented composite sleeve having plastic collar sections alternating with high temperature resilient material annular protrusions for engaging and sealing tubular members of a tubular coupling.

Further objects, features and advantages of the invention will become more apparent from a review of the brief description of the figures taken in conjunction with a detailed description of the preferred embodiment that follows.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of the composite sleeve of the present invention;

Fig. 2 is a partial cross-sectional view of the composite sleeve of Fig. 1 along line 2-2;

Fig. 3 is a cross-sectional view of the composite sleeve of Fig. 2 taken along line 3-3;

Fig. 4 is an exploded perspective view illustrating the composite sleeve of the present invention interposed male and female portions of a block connection; and

Fig. 5 is a cross-sectional view illustrating an assembled block connection with the composite sleeve of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to the Figures, and particularly to Figure 1 there is shown a composite sleeve seal 20 according to the preferred embodiment of the present invention. As shown in Figure 2, the composite sleeve seal 20 is made up of a body portion 22 having spaced apart collar sections 24 that are annular or ring-like in form. The collar sections 24 are preferably composed of a plastic material such as nylon, but may also be composed of a metal or composite material. One of the collar sections 24 may also have a tapered portion 26 having a tapered surface 28. The collar sections 24 have a common inside diameter 24I and outside diameter 24O. The collar sections 24 are interconnected by three link segments 30 between each collar section 24. As shown in Figure 3, the link segments 30 are circumferentially equally spaced apart, and extend axially from the collar sections 24. According to Figure 2, the link segments 30 are integral with each of the collar sections 24 with which they connect such that the entire body portion 22 is constructed of one continuous material. The collar sections 24, finally, are contiguous with seal portions 32 that are also annular or ring-like in form. The seal portions 32 interpose the collar sections 24 and surround the link segments 30, such that the seal portions 32 are positively interlocked with the body portion 22.

The seal portions 32 are preferably made of high temperature rubber such as HNBR or nitrile, or may be made of any other suitable material that can withstand high temperatures, yet remain pliable and flexible to create a seal. The seal portions 32 have a major diameter 32O that exceeds the common outside diameter 24O of the body portion 22, and have a minor diameter 32I subordinate of the common inside diameter 24I of the body portion 22. The seal portions 32 are preferably

contiguous with the collar sections 24 of the body portion 22 and in this instance are sandwiched therebetween. However, axial clearance may be provided between the seal portions 32 and the collar sections 24 if desired. The seal portions 32 are not, but may be fused to the body portion 22 if desired, by a polymer adhesive or by a thermal fusing process.

Here, preferably, the seal portions 32 are mechanically interlocked with the body portion 22. The seal portions 32 are molded in place to the body portion 22, as will be discussed more in detail below. Each seal portion 32 is interposed the collar sections 24 and surrounds each link segment 30 such that the link segments 30 penetrate the seal portions 32, here in three places, to integrate the body portion 22 and seal portions 32 of the composite sleeve seal 20. Any combination of collar sections 24 and seal portions 32 is possible and the number and order of the components is dependent upon the application. At a minimum at least one collar section 24 is contiguous with at least one seal portion 32.

Presently known to one of ordinary skill in the art is a process for molding and interlocking rubber to a more rigid base material, such as metal or plastic. In general, this is a molding process that is commonly referred to as encapsulation or potting, in which a first component is encased or impregnated with a second component of free flowing material that is subsequently hardened in place. Specifically, this process is now routinely used to make common items such as: plastic or metal gaskets having molded-in rubber eyelets; rubber pistons molded over steel substrate; and plastic bodied toothbrushes or pens with molded-in rubber finger grips. Examples of

such items and related manufacturing methods are disclosed in U.S. Patents 5,761,759 and 5,618,047.

Using such a process, the seal portions 32 are molded together with the collar sections 24 to form the sleeve seal 20. Accordingly, the method here would involve producing the body portion 22 including the annular collar sections 24 that

have the link segments 30 extending therefrom. The body portion 22 could be produced by a molding operation if plastic, or a stamping or casting operation if metal. The body portion 22 is then placed in a mold cavity having voids to accept the body portion 22 and voids to accept the seal portion 32. After the mold is closed, the seal portion 32 is then injected into the voids of the mold cavity not occupied by the body portion 22. Thus, the seal portion 32 is molded contiguous with the collar sections 24 and around the link segments 30 for interlocking the seal portion 32 and body portion 22, to integrate the composite sleeve seal 20 as one integral component. After the seal portion 32 has cured, the mold is opened allowing removal of the finished sleeve seal 20.

As best shown in Figure 4, the sleeve seal 20 according to the present invention is shown in a typical conduit block connection 10. The sleeve seal 20 of the present invention is suitable for a variety of tube end-forming applications, such as the block connection 10, or a spring-lock coupling (not shown). The block connection 10 embodies a male block assembly 40, a female block assembly 60, and the sleeve seal 20. The sleeve seal 20 is adapted to surround and engage a male tube 44 that is held to a male connecting block 42 by a roll formed annular upset bead 48. The block

connection 10 also includes the female block assembly 60 including a threaded stud 12 threaded into a female connecting block 62. The female connecting block 62 includes a throughbore 66 into which the male tube 44 and sleeve seal 20 locate upon assembly of the block connection 10.

5 As shown in Figure 5, the male tube 44 and sleeve seal 20 locate within the throughbore 66 of the female connecting block 62. The sleeve seal 20 circumscribes the male tube 44 such that the sleeve seal 20 is disposed between the male tube 44 and the throughbore 66 of the female connecting block 60. The seal portions 32 are radially compressed between the male tube 44 and female connecting block 62 and axially restrained by the collar sections 24 to form the fluid-tight seal. This results in a continuous annular rubber sealing surface from an outer diameter 46 of the male tube 44 to the inner diameter of the throughbore 66 of the female connecting block 62, thus establishing a primary seal.

10 A secondary seal is established by the tapered portion 26 of the sleeve seal 20. The female connecting block 62 further includes a mounting surface 64, and includes the throughbore 66 extending through the female connecting block 62. The throughbore 66 includes a chamfer 68 in the mounting surface 64 where the chamfer 68 and throughbore 66 define a transition surface 70 therebetween. The transition surface 70 is essentially a ring formed from an annulus of intersecting points formed at the intersection of the chamfer 70 and throughbore 66. The tapered surface 28 of the tapered portion 26 of the sleeve seal 20 locates against the transition surface 70 of the female connecting block 62 such that the transition surface 70 engages in annular line

contact against the tapered surface 28 to create a secondary seal of the fluid-tight block connection 10. This, in effect, forces the components on center thereby avoiding side-load types of failures.

From the above, it can be appreciated that a significant advantage of the present invention is the sleeve seal is capable of accommodating dimensional variations in the outer diameter of the male tubular member without affecting the quality and durability of the seal, because the seal portions are flexible and compress. Additionally, unlike machined grooves that accept O-rings, here the tolerance stack ups do not affect the seal that is created by the sleeve seal of the present invention.

Another advantage is that in conventional couplings, the inner diameter of the female tubular member, the width, depth, and symmetry of the O-ring groove, and the O-ring diameter all contribute to the tolerance stack ups affecting the coupling seal. In the present invention, the tolerance stack ups are much easier to control. The dimensions of the sleeve seal can be held to closer tolerances. Thus, the tolerance considerations of the O-ring grooves of typical tube ends are not a factor.

Yet another advantage is that the end-forming process for the present invention is significantly simplified over the processing that is required for a conventional block connection fitting. Conventional end-form processing requires a relatively long bearing surface on the male tube to roll the grooves. With the present invention, there are no grooves, ridges, or protrusions to be machined or formed in the male tubular member. Furthermore, the sleeve seal represents a one-piece component that is easily and quickly slipped over a male tube for assembly. Consequently, the

block connection of the present invention is less expensive, more easily assembled, and more compact than those of the prior art.

An additional advantage is that there is no need for O-ring sealing members. In conventional block connection fittings, O-rings are designed to compress approximately 6% to create a seal. Instead, a combination of the manufacturing variations in machining the O-ring grooves, slight manufacturing variations in the male tubular member and slight manufacturing variances in the female tubular member may result in a tolerance range of 2-15%. A tolerance range of 2% is significantly below the ideal 6% compression for an O-ring seal which results in the O-rings being damaged during assembly, and leads to premature failure and leaks. Likewise, any tolerance over 6% would not compress the O-rings at all, resulting in leaks. The sleeve seal of the present invention is capable of compensating the 2-15% tolerance range and beyond, thereby enhancing the life span and quality of the seal.

Still another advantage is that the elimination of complex tube end-forming processes eliminates the potential for O-ring contamination by particles left behind in O-ring grooves. The problem of side load defects is also eliminated. Side loading, as caused by torque rotational pull, has been eliminated by the sleeve seal of the present invention. The seal portions are evenly compressed throughout their diameter eliminating the pinching and decompression associated with O-rings and O-ring grooves.

A final advantage is that the seal portions of the present invention are positively interlocked, and not only fused, to the collar sections. This will ensure that

the segments that define the rubber volume, and consequently the compressive force, will remain stable in use. This will permit long-term durability and integrity of the sleeve seal in the harsh operating environment of an automotive air-conditioning system.

5 While the present invention has been described in terms of a preferred embodiment, it is apparent that other forms could be adopted by one skilled in the art. For example, the individual seal portions may be integrated into one continuous seal portion molded in place during the seal portion molding step. Additionally, the number and shape of the seal portions could be modified to function as a dynamic seal as well
10 as the static seal disclosed herein. Accordingly, the scope of the present invention is to be limited only by the following claims.

What is claimed is:

1 1. A composite sleeve seal comprising:
2 a body portion including at least one collar section having at
3 least one link segment extending therefrom; and
4 at least one seal portion contiguous with said at least one collar
5 section and surrounding said at least one link segment to interlock said at least one seal
6 portion with said body portion to form said composite sleeve seal as one integral
7 component.

1 2. A composite sleeve seal for sealing a conduit connection, said
2 composite sleeve seal comprising:
3 a body portion including a plurality of collar sections spaced
4 apart from one another to define at least one gap therebetween, said collar sections
5 being interconnected by at least one link segment spanning said at least one gap; and
6 at least one seal portion interposed said plurality of collar
7 sections in said at least one gap and surrounding said at least one link segment to
8 interlock said at least one seal portion with said body portion to form said composite
9 sleeve seal as one integral component.

1 3. A composite sleeve seal as claimed in claim 2 wherein said at
2 least one collar section is made of plastic material and said at least one seal portion is
3 made of rubber material.

1 4. A composite sleeve seal as claimed in claim 2, wherein said at
2 least one link segment comprises three link segments interconnecting each of said
3 plurality of collar sections together.

1 5. A composite sleeve seal as claimed in claim 4, wherein said
2 three link segments extend axially between each of said plurality of collar sections.

1 6. A composite sleeve seal as claimed in claim 5, wherein said
2 three link segments are circumferentially spaced 120 degrees apart.

1 7. A composite sleeve seal as claimed in claim 2, wherein one of
2 said plurality of collar sections includes a tapered portion having a tapered surface
3 thereon.

1 8. A fluid-tight conduit connection comprising:
2 a female component;
3 a male component positioned within said female component such
4 that said female component circumscribes said male component; and

5 a composite sleeve seal circumscribing said male component
6 such that said composite sleeve seal is interposed said male and female components for
7 sealing said fluid-tight conduit connection, said composite sleeve seal comprising:

8 a body portion including a plurality of collar sections
9 interconnected by at least one link segment; and

10 at least one seal portion interposed said plurality of collar
11 sections and surrounding said at least one link segment to interlock said at least one
12 seal portion with said body portion to integrate said composite sleeve seal;

whereby said at least one seal portion is compressed by said male and said female components to primarily seal said fluid-tight conduit connection.

9. A composite sleeve seal as claimed in claim 8, wherein said at least one link segment comprises three link segments interconnecting each of said plurality of collar sections together.

10. A composite sleeve seal as claimed in claim 9, wherein said three link segments extend axially between each of said plurality of collar sections.

11. A composite sleeve seal as claimed in claim 10, wherein said three link segments are circumferentially spaced 120 degrees apart.

12. The fluid-tight conduit connection as claimed in claim 8, wherein said female component includes a mounting surface and a throughbore extending through said female component, said throughbore having a chamfer in said mounting surface, said chamfer and said throughbore defining a transition surface therebetween.


13. The fluid-tight conduit connection as claimed in claim 12, wherein one of said plurality of collar sections includes a tapered portion having a tapered surface, said tapered surface locating against said transition surface of said female component such that said transition surface engages in annular line contact against said tapered surface to secondarily seal said fluid-tight conduit connection.

14. A method of manufacturing a composite sleeve seal comprising the steps of:

3 producing a body portion including at least one collar section
4 having at least one link segment extending from said collar section;
5 placing said body portion in a mold cavity; and
6 injecting a seal portion into said mold cavity around said body
7 portion contiguous with said at least one collar section and around said at least one link
8 segment for interlocking said seal portion and said body portion to integrate said
9 composite sleeve seal as one integral component.

ABSTRACT OF THE DISCLOSURE

A composite sleeve seal for sealing a conduit connection including a body portion having collar sections spaced apart from one another to define gaps therebetween, and being interconnected to one another by link segments spanning the gaps. A seal portion interposes the collar sections in the gaps and surrounds the link segments to positively interlock the seal portion with the body portion to form the composite sleeve seal as one integral component.



Please type a plus sign (+) inside this box ----> ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00 OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)	Attorney Docket Number	FTP141A US
	First Named Inventor	Jerry H. Chisnell
	<i>COMPLETE IF KNOWN</i>	
	Application Number	/
	Filing Date	
	Group Art Unit	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	OR	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
Examiner Name		

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Composite Sleeve for Sealing a Tubular Coupling

the specification of which (Title of the Invention)

☒ is attached hereto

OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 11 9(e) of any United States provisional application(s) listed below

Application Number(s)	Filing Date (MM/DD/YYYY)

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box --> ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/S13/0213 attached hereto

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number OR ☐ Registered practitioner(s) name/registration number listed below

Place Customer Number Bar Code label here


Name	Registration Number	Name	Registration Number
Remy J. VanOphem	27053		
Thomas A. Meehan	19713		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number or Bar Code Label OR ☒ Correspondence address below

Name	Remy J. VanOphem				
Address	VanOphem, Meehan & VanOphem, P.C.				
Address	755 West Big Beaver Road, Suite 1313				
City	Troy	State	MI	ZIP	48084
Country	U.S.A.	Telephone	(248) 362-1210	Fax	(248) 362-4055

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

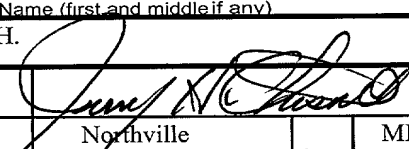Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle if any)		Family Name or Surname			
Jerry H.		Chisnell			
Inventor's Signature			Date	3/24/00	
Residence: City	Northville	State	MI	Country	U.S.A.
Post Office Address	19875 Maxwell, Northville, Michigan 48167				
Post Office Address	19875 Maxwell, Northville, Michigan 48167				
City	Northville	State	Michigan	ZIP	48167
				Country	U.S.A.

☐ Additional inventors are being named on the supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto